90° PALLET TILTER

Strong

Unique

Moveable

Pallet Tilters up to 80.000 kg

Let us take care of your backproblems !!!

Due to the unique construction of the EASY - TEC Pallet changer, only one person is able to change a pallet quickly and above all safe.
The pallets can be placed on the unit by means of a forklifttruck or stacker.
With a single push of the button the pallet is tilted 90° within 15 seconds.
During the last part of the tilting movement, the platform is automatically retracted for about 100 mm, so the old pallet can be taken away, and the new pallet can be inserted!
As standaard, the unit is deliverd with a 1Ph 230 V connection so it can be placed in every environment. It speaks for itself that a 3Ph 400 V connection can be delivered.
The complete unit is electrically operated, so there are no hydraulics cylinders and oil present.
For all EASY-TEC pallet changers , no expensive pits or safety gates are needed.
The unit doesn't even have to be bolted to the floor!
The unit can be picked up with for instance a forklifttruck, and is therefore executed with fork-entries at the bottom.

At MQ Lift BV you'll find the perfect solution for any of your tilting or changing problems !!!

MQ Lift BV

90° PALLET TILTER

TECHNICAL SPECIFICATIONS:

- Universally applicable
- Moveable as standard
- Mains 230 V
- Standard, or according to customers specifications
- Highly accurate controlled
- 90 ° tilting movement
- Pallets changed within 1 minute, highly productive
- Capacity up to 80.000 kg
- No additional safety gates needed, extreme user friendly
- Delivered with CE - certificate

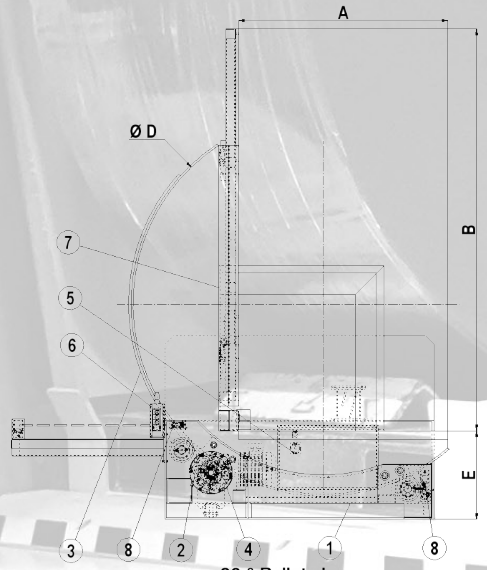

90 ° Pallet changer

	90° changer
A	1300 mm
B	2400 mm
C	1300 mm
Ø D	2250 mm
E	600 mm

8	Safetystop
7	Tilting platform
6	Controls
5	Electrical box
4	Safety system
3	Tilting mechanism
2	Motor
1	Baseframe
POS	Naming

40 ton coils tilter with conveyor system

3.5 ton tilter for boxes of glass

3.5 tons of tilting coils on pallet

3 tons of tilter for Aluminium coils

2 tons for spliting 2 pallets

ACCESSORIES:

- Infra-red controls.
- Changed tiltingspeeds.
- Locking devices for coils.
- Conveyor-platform.
- Stainless steel or plastic platforms.

MQ Lift BV
Ruisvoorn 1
NL- 4941 SB Raamsdonksveer
Nederland

Tel. +31 (0) 162 580979
Mobile: +31 (0) 6 51504188
e-mail: info@mqlift.com
Website: www.mqlift.com

Note: changes in technical specifications and design are subject.

MQ Lift BV